



ING. L. & A. BOSCHI
IMPIANTI LIQUEFAZIONE E PRODUZIONE GAS TECNICI

OXYGEN & NITROGEN PLANTS

IN TECHNICAL COLLABORATION WITH

ING L&A BOSCHI OF ITALY




OXYGEN & NITROGEN PLANT UBT SERIES
(CAPACITY 50 Nm³ /hr to 1000 Nm³/hr)
CRYOGENIC AIR SEPARATION PLANT



Convenience Stability & Energy-saving are our devotion & pursuit

3D VIEW OXYGEN PLANT-UBT SERIES

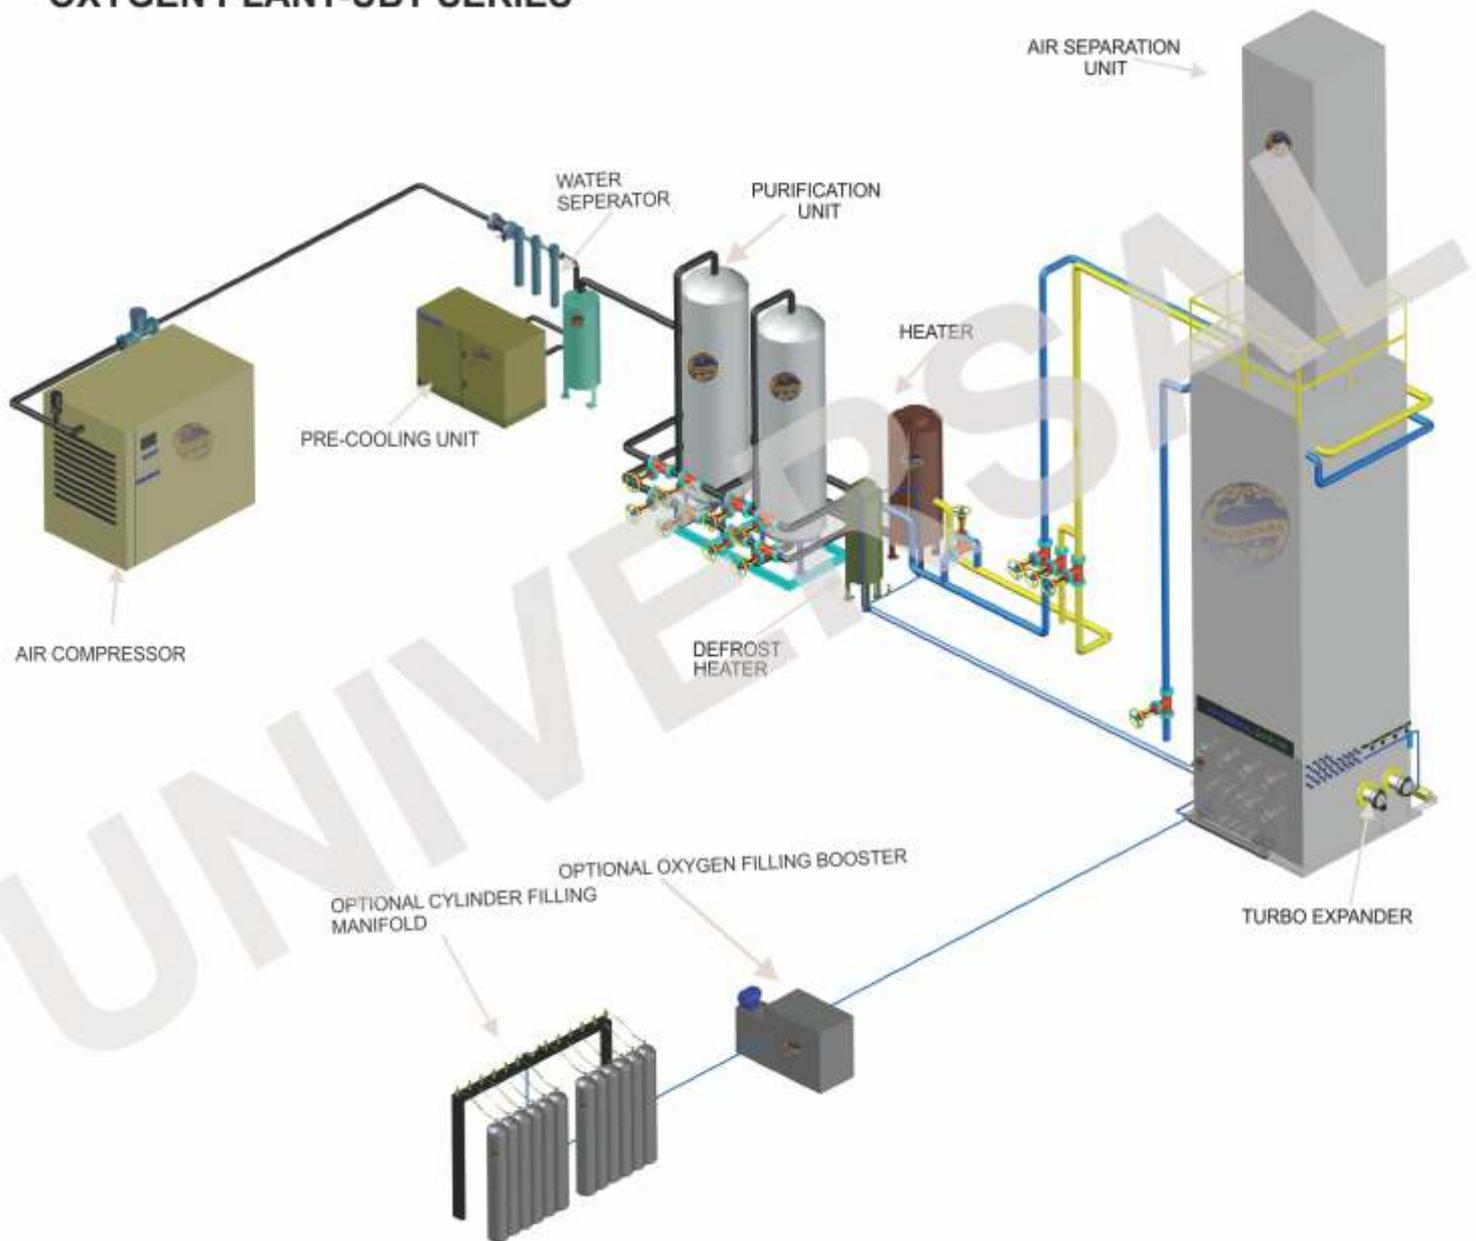

Company profile

Universal in Collaboration with **ING.L.A. BOSCHI Italy SINCE 1930** manufactures & suppliers Premium Quality low pressure Air separationplants of all sizes ranging from 30m³/hour to 50,000m³/hour.

Universal is a certified ISO 9001:2000 organization and the latest achievement includes the successful approval for CE Certification which makes our company the first in Asia to certified for Cryogenic Pressure vessel ,Plant machinery exports to Europe and USA.We have success in the low Pressure plants as it is the technology of today and the future.We have manufactured over 300 plants since last 23 years since 1985 at New Delhi and supplied to over 40 countries world wide.



PROCESS DESCRIPTION

Air compressor-low pressure

Air is compressed at a low pressure of 5-7 Bar. Air can be compressed at such low pressure by trouble free rotary compressor (screw / centrifugal type advanced technology is employed in lieu of old bulky piston compressor.)

Pre-cooling System

The second stage of the process uses a low pressure refrigerant for pre-cooling the processed air to temperature around 12 deg C before it enters the purifier.

Purification of air by purifier

The air enters a purifier consisting of twin molecular sieve driers, working alternatively. The molecular sieve remove the carbon dioxide & moisture from the process air before the air enters air separation unit.

Cryogenic cooling of air by turbo expander

The air has to be cooled to sub - zero temperature for liquification & the cryogenic refrigeration & the cooling is provided by highly efficient turbo expander. which cools the air to temperature almost below -165deg C to -170 deg C.

Separation of liquid air into oxygen nitrogen by air separation column

Oil free, moisture free & carbon dioxide free air enters into low pressure plate fin type heat exchanger where the air is cooled below sub-zero temp by air expansion process in the turbo expander. Due to the excellent thermal efficiency we can achieve a temperature difference delta T as low as 2 deg C at the warm end of these exchangers.

Air gets liquified when it enters the air separation column & gets separated into oxygen nitrogen by process of rectification

Oxygen is available at the outlet of the ASU at a purity of 99.6%.

Nitrogen is also available at the outlet as a second product at purity of 99.99% upto 3ppm simultaneously without loss of oxygen product.

Compression of oxygen filling in the cylinder


The final product in the form compressed oxygen/nitrogen goes to the high pressure oxygen cylinder at 150 Bar or upto higher as required.

Or for pipe line supply or captive consumption.

Or for liquid plants to fills in cryogenic liquid tanks.



PROCESS DRAWING OF OXYGEN PLANT

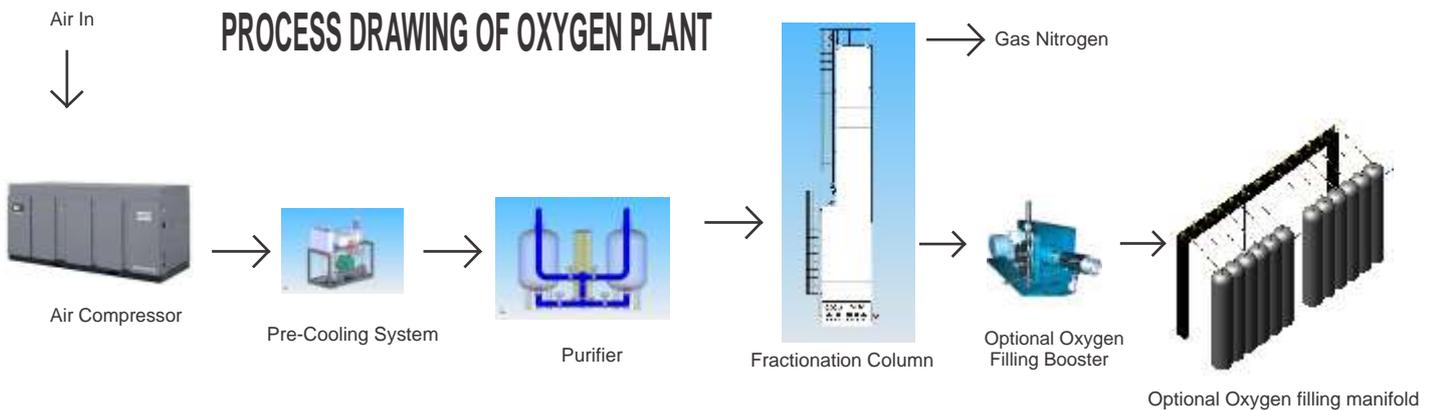



ADVANTAGES OF OXYGEN PLANT UBT SERIES

- *High purity.
- *Quick start-up after tripping and shut down.
- *Supply of liquid oxygen /nitrogen to tank.
- *Easy operation.
- *Automatic change over of molecular sieve available as option
- *Long operation period.
- *Remote control available.
- *Very low power consumption
- *Byproduct: nitrogen 99.999% upto ppm.



Client from australia



Client from U.K.

Basic Principle

We are supplying low pressure plants manufactured by us with the following main components:

- 1.Low pressure Rotary compressor or Oil free piston air compressors.
- 2.Low pressure driers.
- 3.Low pressure refrigerant drier.
- 4.Turbo expander.
- 5.Low pressure air separation unit.






Rotary Screw Type



Stationary Compressor



Centrifugal Type



Rotary Screw Type

1. AIR COMPRESSOR

A good air compressor with good quality is crucial to oxygen and nitrogen plant in its reliability maintenance, compressing capacity, product quality and efficiency.

The discharge pressure of air compressor for air separation plant is usually within 1.0 Bar, so there exists a wide selection of Atlas Copco rotary screw type and oil flooded, oil free screw type, Centrifugal type and Rotary screw type.

The selection of air compressor is subject to the size of the oxygen plant. Usually for a small-scale nitrogen plant, oil-free screw type is enough. An oil-free piston type compressor is also a good option if a very robust compressor is required for worse site conditions.

For a larger and medium-scale oxygen/nitrogen plant, there should be equipped a centrifugal air compressor. It functions stably with low operating cost, but the investment is usually very large. Besides, a centrifugal compressor needs a self-cleaning air filter.



Technology

The air separation plant is a plant recovering oxygen and nitrogen from air simultaneously. It advances low pressure technology process of Bosch Italy using Rotary screw compressor (or low oil free piston compressor) and turbo expanders. The feed air entering the Molecular Sieve purification system employed to remove the moisture and CO₂ from the process air. The air is liquefied by cryogenic cooling using latest plate and fin high efficiency heat exchangers and turbo expanders. The liquid air separates into oxygen, nitrogen and inert gases in the air separation column.



1. Elektronikön

Automatic electronic control and monitoring of the compressor optimizes the operation for efficiency, reliability and ease of maintenance.

2. Fan

Low speed radial fan provides a high cooling air flow at extremely low noise levels.

3. Integral coolers

Compact coolers dimensioned to ensure ideal running temperatures under all conditions and are easy to clean.

4. Multi-stage oil separator

Three-stage oil separation process yields a 2 ppm oil carry-over for minimum contamination and maintenance.

5. Air inlet filter

Heavy-duty, multi-stage inlet filter offers particle removal down to 1 micron. Large element surface for long lifetime and minimal pressure drop.

6. Drive arrangement

Gear driven for optimal energy efficiency and minimal maintenance. Utilizes flexible coupling for reduction of starting torque loads on compressor components.

7. Motor

High efficiency, totally enclosed fan-cooled (TEFC), IP55, class F electrical motor is flanged and permanently aligned with the compressor to ensure continuous, trouble-free operation.





8. Element

Atlas Copco's patented screw element provides optimal energy efficiency and outstanding reliability.

9. Integrated dryer (optional)

The Full Feature version includes either an integrated refrigerant or heatless desiccant dryer, for minimum installation cost and floor space requirement.

10. Integrated filters (optional)


The Full Feature version can include integrated filters to remove particulates and oil carryover. Filtration is provided in accordance with ISO 8573-1, with a choice of either class 1 or class 2 to protect against contamination of finished product.

11. Integrated oil-water separator (optional)

The fully automatic optional oil-water separator separates the oil-water condensate without the use of costly activated carbon. The condensate exceeds EPA requirements so it can be deposited directly into the drainage system.

12. Dryer bypass (optional)

The dryer bypass, which is conveniently piped to the edge of the canopy, enables the compressor to operate even when the dryer requires maintenance.




2. PRE-COOLER SYSTEM

The Pre-cooler equipped in the oxygen/nitrogen plant is provided by professional manufacturer. It is skid mounted with main equipments imported. Function of pre-cooling system is to cool down the compressed air to 5~8°C, and to discharge the condensed water.



3. PURIFYING SYSTEM



Purifying system is for secondary removal of moisture carbon dioxide and most of the hydrocarbons that would disturb processing. It works on double-layers of molecule sieve and alumina adsorption.

Through reasonable structure design, the service life and adsorption performance are both strengthened, and thus to ensure a continuous performance of the fractional column.

Regarding the shift, there are generally two types of purifier: automatic shift controlled by PLC, and manual shift. Regarding the structure, there are also two types; skid-mounted type and separate-structure type. The skid-mounted purifier is easy to install and move, but the cost is relatively high. The separate-structure type is always installed at work site with low cost.

Selection of purifying system is subject to the scale and the investment of the oxygen/nitrogen plant by the customer.



Expansion turbine



Gas bearing expansion turbine

4. EXPANSION TURBINE

An oxygen/nitrogen plant always works on process of back flow expansion turbine when there is a need of expand capacity larger than 3000m³/h. Small capacity plants having air flow from 300Nm³ to 3000m³/h, it is often equipped gas-bearing expansion turbine.

The turbine is to increase the flow rate of the compressed gas through a nozzle; meanwhile, the speeded gas drives the wheel & output power through the rotor. During this process, both the pressure and temperature of gas lowered down, thus to provide cold capacity. In modern air separation plant, the cold capacity by turbine takes about more than 90% of entire cold capacity needed.

5.COLD BOX

Fractionation column is the key part of the entire plant, where separation of oxygen/nitrogen is carried out through heat transfer by very highly efficient plate and fin tube exchangers current being used by all the leading manufactures in the world like Linde, Air Liquide air products USA.


Based on different processes, there are mainly two types of fractionation column single stage column and double stage column.

The fractionation column designed and manufactured by us has a superior systematic performance, flexibility and stability. The purity and recovery both have been equivalent with the most advanced international technologies.

We equip plate-fin type heat exchanger and full aluminum structure to main part of internal components of the cold box, which is close sealed and filled in gas to preserve pressure. Thus the cold loss caused by heat in leak is reduced to large extent. Cold box below 6000Nm³/h can be assembled within our workshop, which could reduce work load at customer's work site and supplied as a packaged unit.



Plate & Fin type exchanger

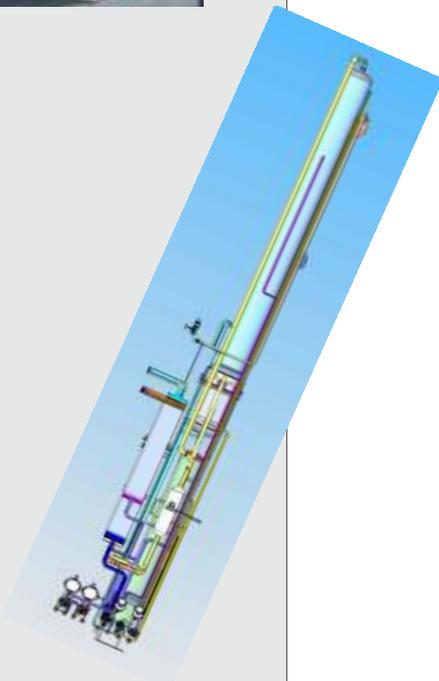

6. INSTRUMENT-CONTROL SYSTEM



Instrument-control system, the window of the whole plant, could reflect all the information of the plant during its operation. A common instrument-control system is equipped with side by cabinet and digital display together to reveal those parameters as pressure, temperature and flow rate. It is easy to operate, and the cost is relatively little.



Centralized control system is equipped with PLC or DCS from Siemens for the function of display, operation, adjusting, memorizing, recording, alarming, interlock, start-up and shut down. In the computer, there are displays of main menu, process flow, parameter list, alarm and history trend. Network control of multi-computer is also achievable.

As fast development of internet, based on DCS & PLC, the network could connect the control system at customer's end together with the manufacturer's office for observation and supervision. Thus, if there is any problem in operating the plant, we would be able to offer a help hand in time, providing solution or technical support. Selection of control system depends finally on the requirement of the customer.

ANALYSIS CABINET

Analysis cabinet is to quicken the response speed, improve precision, protect the analytical instruments, convenient check out and offer standard gas.

The Components of analytical gas can be collocated according to customer's requirement as follow:

Micro oxygen, micro moisture CO₂, and other components of high-purity nitrogen (such as H₂, CO, CH₄----



Introducing BOSCHI Italy UBT Series (Oxygen Series)

The world standard in packed cryogenic air separation plants.

UBT series plants are designed and built to meet the most severe operating conditions. Regular inspection and performance testing actual operating conditions is a pre requisite at our factory to assure highest quality.


Some of the advantages of UBT series are:-

-Minimization of transportation & handling expenses.

-Rapid on- site installation & commissioning

Over 300 air separation plants are working produced by universal in collaboration with ING.L.&A.BOSCHI all over the world.

PROCESS FLOW DIAGRAM

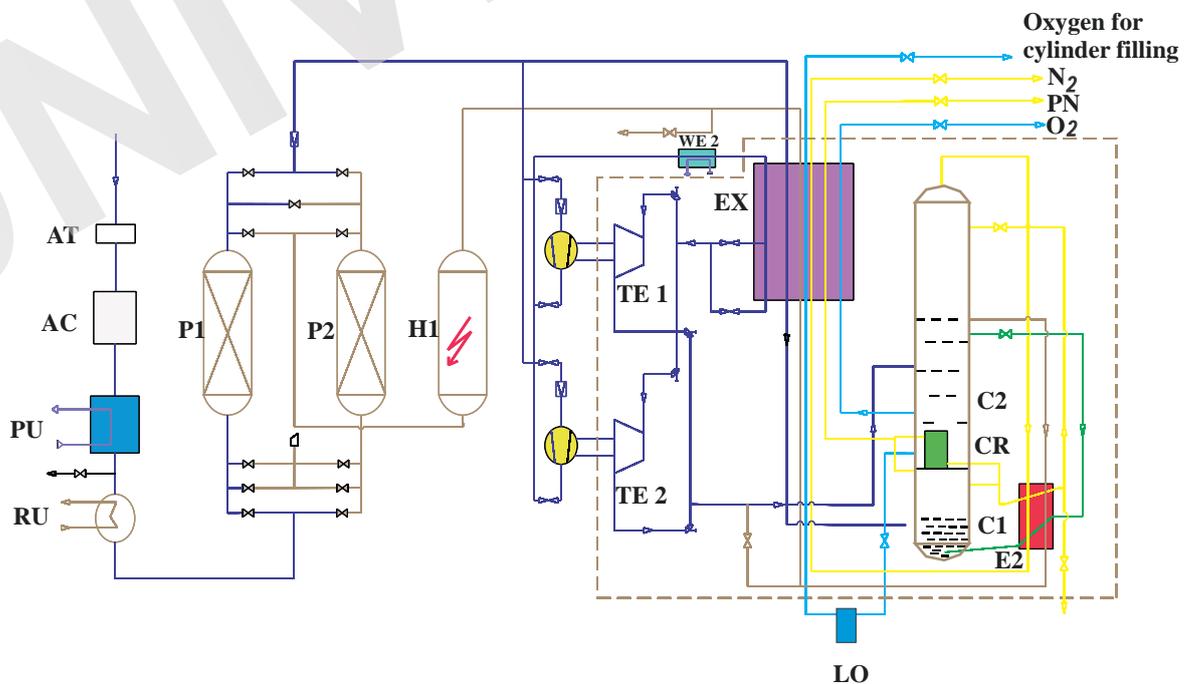


AI	AIR FILTER	H	HEATER	CR	CONDENSOR REBOILER
AC	AIR COMPRESSOR	EX	MAIN HEAT EXCHANGER	C2	LOW PRESSURE COLUMN
PC	PRE-COOLING UNIT	TE1/2	TURBO EXPANDER	LO	LIQUID OXYGEN PUMP
PU	PURIFICATION UNIT	E2	SUB COOLER		
P1/2	TOWER1/TOWER 2	C1	COLUMN		

Production	UBT 50	UBT 100	UBT 200	UBT 250	UBT 300	UBT 350	UBT 400	UBT 500	UBT 600	UBT 800	UBT 1000
Oxygen (Nm3/hr)	50	100	200	250	300	350	400	500	600	800	1000
Nitrogen (Nm3/hr)	50	100	200	250	300	350	400	500	600	800	1000
Purity											
Oxygen (%)	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6
Nitrogen (99.9-99.99%)											
Utilities											
Cylinder Filling	150-200 Bar										

*Indicative : End specifications are as per actual offer.

Note:-

- 1.) No water required for cooling the air compressor, air cooled type
- 2.) Skid mounted can option.
- 3.) I.S.O. frame available.
- 4.) Containerized option available.
- 5.) Nitrogen production standard 99.9% and upto 99.99% or 99.999% without loss of oxygen production.
- 6.) Oxygen filling booster for filling cylinder upto 150 bar available

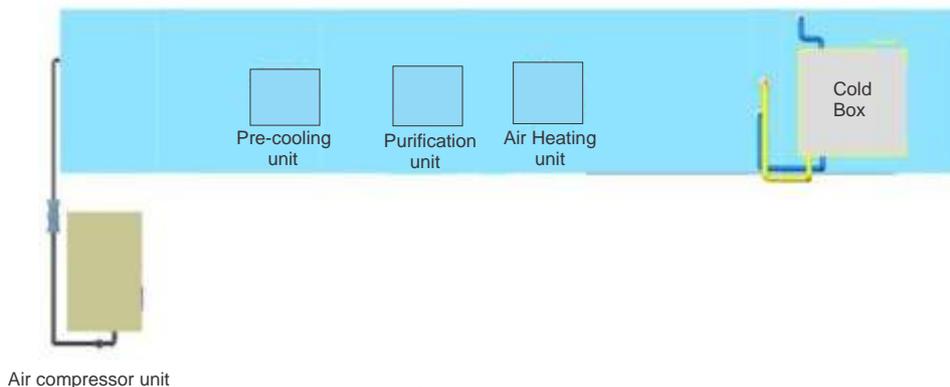

Plan view



ING. L. & A. BOSCHI
IMPIANTI LIQUEFAZIONE E PRODUZIONE GAS TECNICI

Name of the Models	UBT-50	UBT-100	UBT-200	UBT-250	UBT-300	UBT-350	UBT-400	UBT-500	UBT-600	UBT-800	UBT-1000
Capacity (CuM/Hr)	50	100	200	250	300	350	400	500	600	800	1000
No. Of cylinders in a Day (Oxygen/Nitrogen)	200	400	800	1000	1200	1400	1600	2000	2400	3200	4000



OXYGEN & NITROGEN PLANTS

IN TECHNICAL COLLABORATION WITH

ING L&A BOSCHI OF ITALY

UNIVERSAL INDUSTRIAL PLANT MFG.CO.(P)LTD
(In Collaboration ING.L.&A.BOSCHI,Italy)

Tel:-91-124-4386250,91-9871872626,
E-mail:-info@universalboschi.com,universalboschi@gmail.com
Website:-www.oxygengasplant.net,www.oxygenplants.com